


**BATTERIES**

**SE100AHA**



Nominal Capacity		100 Ah
Nominal Voltage		3.2 V
Internal Impedance (1kHz AC)		≤ 0.9 mΩ
Charging Cut-off Voltage (CCCV Model)		3.6 V
Discharging Cut-off Voltage		2.5 V
Recommend Charging-Discharging Current (0.3C,A)		30
Maximum short-tine Discharging Current (period ≤10s,A)		800
Life Cycle (0.3C Charging-discharging, 80%DDC)		2000
Operating Thermal Ambient	Charging	0 °C ~ 45 °C
	Discharging	-20 °C ~ 55 °C
Storage Thermal Ambient		-20 °C ~ 45 °C
Weight (kg)		3.2 kg (±0.1kg)
Shell Material		Plastic

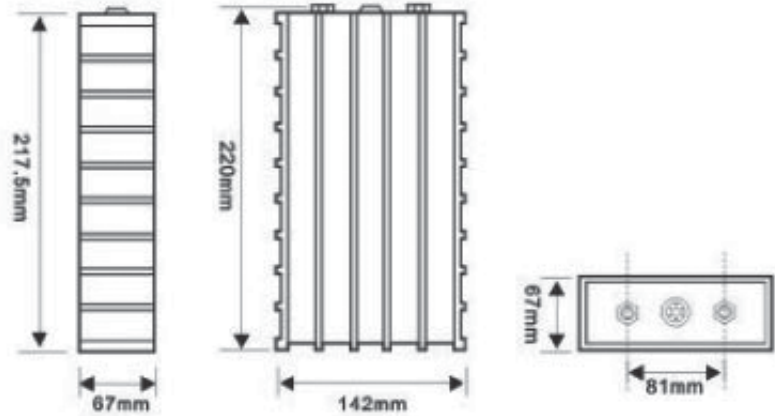