


BATTERIES

SE60AHA



Nominal Capacity	60 Ah	
Nominal Voltage	3.2 V	
Internal Impedance (1kHz AC)	≤ 1 mΩ	
Charging Cut-off Voltage (CCCV Model)	3.6 V	
Discharging Cut-off Voltage	2.5 V	
Recommend Charging-Discharging Current (0.3C,A)	18	
Maximum short-tine Discharging Current (period ≤10s,A)	700	
Life Cycle (0.3C Charging-discharging, 80%DDC)	2000	
Operating Thermal Ambient	Charging	0 °C ~ 45 °C
	Discharging	-20 °C ~ 55 °C
Storage Thermal Ambient	-20 °C ~ 45 °C	
Weight (kg)	2.5 kg (±0.1kg)	
Shell Material	Plastic	

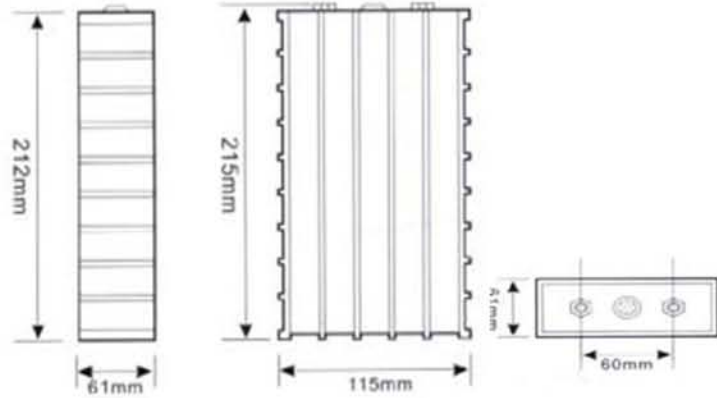